

# CFW-11

## Variable Speed Drives



Diagram illustrating the connection of the CFW-11 Variable Speed Drive to a three-phase AC power source and a three-phase motor.



Close-up view of the CFW-11 VFD control panel, showing the digital display and navigation buttons.



Close-up view of the CFW-11 VFD digital display, showing operational parameters:

Parameter	Value
Run	LOC 1500rpm
Speed	1500 rpm
Current	17.1 A
Frequency	50.0 Hz
Time	08:12
Menu	



Close-up view of the CFW-11 VFD output terminals connected to a three-phase motor.



Main image of the CFW-11 VFD unit, showing the digital display and navigation buttons.



Grid of 12 blue squares of varying shades, used for color calibration or design purposes.



Weg logo.

## CFW-11

The CFW-11 is a variable speed drive series with state of the art technology for three-phase induction motors. It can be used in a wide range of applications, since it is designed for running on either Normal or Heavy Duty loads. Its performance is excellent, providing increased productivity and an improvement in the quality of the process in which it is used.

1.1 to 2.2kW - 1.5 to 3HP  
200-240V - Single-phase

1.1 to 55kW - 1.5 to 75HP  
200-240V - Three-phase

1.5 to 370kW - 2 to 600HP  
380-480V - Three-phase

**New Frame Sizes F & G**



### Innovative and simple

The CFW-11 presents many innovations that are helpful and beneficial to customers, mainly due to the simplicity of its installation and operation. The CFW-11 was developed based on Plug-and-Play philosophy (connect and use) allowing simple and fast installation of the VSD and its accessories. The Keypad has a navigation and programming system similar to mobile phones, with soft-key buttons. It is possible to access the parameters sequentially or through groups of parameters. The Keypad also makes the Oriented Start-up function available, guiding the user through the necessary programming.

### Flexibility

The CFW-11 adapts itself to the customer's needs through a broad range of accessories, which are easily installed. Besides this, the standard product comes with the SoftPLC function that attributes PLC functions to the VSD, which allows the customer to create his/her own applications (user programs) through the WLP software (programming in LADDER).



## Technology - Patents

### Vectrue Technology®


#### WEG VARIABLE SPEED DRIVE CONTROL TECHNOLOGY

- Linear and adjustable V/f, VVW (Voltage Vector WEG) and vector controls are available in the same product.
- Two types of vector control: Sensorless and closed loop Vector control (Encoder Interface required).
- Sensorless vector control permits high torque and quick response in open loop, even at low speeds.
- The self-tuning function automatically matches the vector control or VVW to the motor and load used.
- Through the adjustable V/f control, it is possible, for example, to adjust a quadratic V/f curve, providing energy savings for quadratic torque loads (e.g.: centrifuge pumps and fans).

### Optimal Braking®

In applications where inertia is a relevant point and short deceleration times is required, great amount of energy is returned from the motor to the VSD. To handle this energy, traditional VSDs have to dissipate it as heat in power resistors. Such resistors are usually heavy and some installation criterias must be considered due to their heat dissipation. As an option to the use of braking resistors, CFW-11 features a special braking method in vector control mode known as “Optimal Braking®”. This innovation delivers to the load a high performance braking torque without requiring a braking resistor.

The following graph shows the advantages of using Optimal Braking® compared to other methods, thus ensuring an ideal, optimized and low cost solution for braking applications.

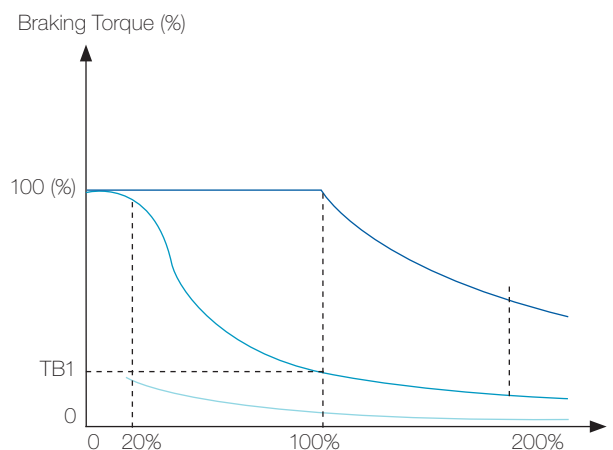

**Typical Braking Torque x Speed Graph for a 10 HP / 7.5 kW motor driven by a CFW-11**

- Dynamic Braking Torque Curve
- Optimal Braking® Torque Curve
- DC Braking Torque Curve

### Wmagnet Drive System®

Frequency inverter system with permanent magnet motors (Wmagnet), the motor with the highest efficiency in the market with the CFW11 inverter.

It is perfect for applications where speed variation, low noise level and reduced size are required. In sensorless control the Wmagnet Drive System® is able to do torque control with zero speed and it can run motor in very low speed without the need of forced ventilation.



### Optimal Flux®

#### TECHNOLOGY FOR MOTORS DRIVEN BY VSDs IN APPLICATIONS WITH CONSTANT TORQUE LOADS


- Rated torque at low speeds eliminating the need for independent ventilation or motor oversizing.
- Space saving and cost reduction of the application.
- Improved performance of the package VSD and motor (an exclusive WEG solution).

High efficiency WEG motor + CFW-11

Solution applied only to CFW-11 with high efficiency WEG motors.

## Applications

The CFW-11 can be used in both simple and sophisticated applications, due to its broad range of functions and easy configuration, installation and operation. The CFW-11, through its Vectrue Inverter technology, presents excellent static and dynamic performance, precise torque and speed control, dynamic response, positioning precision, and high overload capacity. The CFW-11 was also developed for applications where the decisive factor is safety, through several built-in protections and alarms as well as through the safety stop function in accordance with EN 954-1, category III.

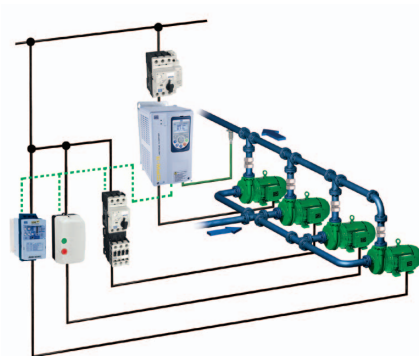


### Multi-Pump Control

The CFW-11 features the Multipump Control, which permits the CFW-11 to control up to 5 pumps in order to maintain the pipeline pressure constant regardless of the outflow fluctuations.

In this system, an intelligent control of the pumps is done by the VSD, which decides the moment to start or stop each of the pumps based on the outflow demand. Besides that, the VSD also monitors the suction pressure and the tank level. The CFW-11 also alternates the pumps according to their using time, thus ensuring an uniform wear and tear of motors and pumps.

Two types of Multipump Control are available: fixed and floating controls. In fixed control, the VSD is able to control one of the pumps at variable speed and to start and stop other 4 pumps at fixed speed. In floating control, the VSD is able to control up to 4 pumps, all of them at variable speed.

The Multipump Control for CFW-11 is available as an applicative software for SoftPLC function (see page 17) and can be downloaded from [www.weg.net](http://www.weg.net)

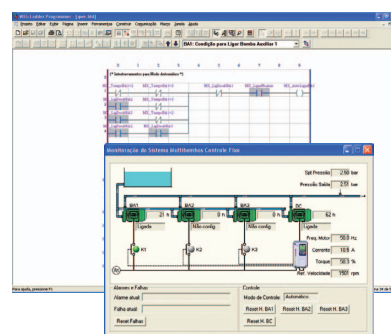

### Pumps and fans

- Precise control of process variables (pressure, flow, temperature, etc.) through a PID regulator superposed to the speed control.
- Optimization of power consumption through speed control with an adjustable V/f curve.
- Possibility of safety and maintenance signaling and alarms of pumps and fans.
- Availability of PID regulators to control other process accessories like valves, dumpers, other VSDs, etc.



### Compressors

- Optimization of system pressurization control with energy savings and improvement of compressor efficiency.
- Reduction of motor startup current minimizing the wear and tear of the mechanical system permitting a reduction of contracted demand.
- Possibility of safety and maintenance signaling and alarms of pressurization system.
- Provides startup system control of other compressor units with an increased efficiency of the pressurization system.





# Applications

## Paper and Cellulose / Wood

- Three monitoring parameters displayed at once on the HIM
- USB communication port at the front of the VSD for data monitoring and parameters configuration via software Superdrive.
- Highly precise speed and torque control.
- Flexible hardware programming and configuration, making easier applications where synchronism is demanded.
- Possibility to be integrated in a variety of communication protocols mainly used in the industry.
- Provided in a compact design the CFW11 Series allows the assembly directly next to one another with no reduction of ambient temperature.
- Quick and simplified programming.
- Highly reliable and robust.
- For large power ratings modular topology can be used( CFW-11M).



## Cement and Mining

- Robust and large overload capacity(models sized in HD).
- Provided in a compact design the CFW11 Series allows the assembly directly next to one another with no reduction of ambient temperature.
- Possibility to be integrated in a variety of communication protocols mainly used in the industry.
- Quick and simplified programming.
- Highly reliable and robust.
- For large power ratings modular topology is used( CFW-11M)



## Chemical and Petrochemical

- Highly reliable and robust.
- Provided in a compact design the CFW11 Series allows the assembly directly next to one another with no reduction of ambient temperature.
- Plug-and-play system for additional modules, ensuring elevated flexibility in adapting to existing systems.
- Possibility to be integrated in a variety of communication protocols mainly used in the industry.



## Ironworks and Metallurgy

- Highly precise speed and torque control.
- Large overload capacity (models sized in HD).
- Flexible hardware programming and configuration.
- Possibility to be integrated in a variety of communication protocols mainly used in the industry.
- Provided in a compact design the CFW11 Series allows the assembly directly next to one another with no reduction of ambient temperature.
- For large power ratings modular topology is used( CFW-11M)



## Applications

### OverHead Crane / Lifting

- SoftPLC function.
- Three modes of vector control.
- Highly compact.
- Intelligent control of ventilation system.



### Cooling

- SoftPLC function built in the standard product enabling the use of two controllers simultaneously. This characteristic is for HVAC applications.
- Three monitoring parameters displayed at once on the HIM
- USB communication port at the front of the VSD for data monitoring and parameters configuration via software Superdrive.



### Sugar and Alcohol

- Modular and compact.
- 12-pulse rectifier for reduction of harmonic content.
- Regenerative rectifier for centrifuges.
- Highly robust and reliable.



### Process Machines

- Built-in PLC and Real Time Clock.
- High connectivity.
- Fieldbus.
- Highly precise speed and torque in all speed ranges.
- User friendly interface and programming.



## Keypad

The CFW-11 keypad was developed for simple and fast interaction while providing excellent visibility for the user.

### Easy to use Interface Tools:

- Graphic display.
- Soft-keys for easy operation.
- Backlight.
- Real time clock.
- Copy function.
- Plug-in (connection with CFW-11 turned on).
- Language selection.
- Remote Keypad.

Left soft-key: function defined by the display

FWD/REV Selection

Local / Remote Selection



Right soft-key: function defined by the display

Key for scrolling through menus and parameters and for modifying parameter content

Start key

Stop key

JOG key




### Remote Keypad

The Keypad can be installed on panel doors or machine consoles with a protection degree of IP56.



## Monitoring Modes

The keypad can be configured to display reading parameters in three different modes.

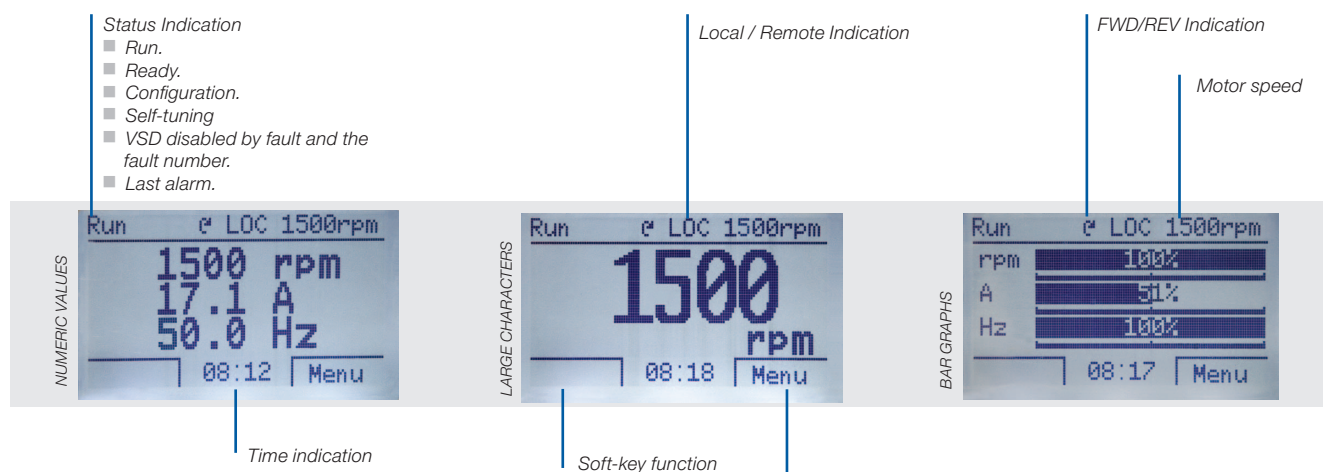

The keypad displays parameters in a hierarchy mode organized by groups.


### Oriented Start-up

For simplified Start-up, CFW-11 guides the user through the necessary programming to adjust the VSD to the motor and power supply.




### Basic Application

The Basic Application Group contains the basic parameters, which need to be adjusted in most applications. The CFW-11 guides the user through these parameters.





### Fault History Group

It shows the parameters with the last 10 faults and the day, month, year and time when they occurred.



### Read Only Parameters Group

It shows reading parameters only.



### Backup Parameters Group

The Backup Parameters Group allows CFW-11 parameters to be transferred to the Keypad or FLASH Memory Module (available in the standard product) and vice versa. During CFW-11 operation, the modified parameters are saved in the FLASH Memory Module regardless of user command.

### Functions Group

There are several groups divided by functions, only making available only the parameters related to the function. Example: Vector Control Group, Communication Group, I/O Configuration Group, etc.

### Selectable Language


The user can choose the Keypad language: Portuguese, English, Spanish, German, etc.

### Changed Parameters Group

It shows only the parameters that are programmed different from the factory default.

## Accessories

CFW-11 was developed based on Plug-and-Play philosophy. It automatically recognizes and manual configuration.

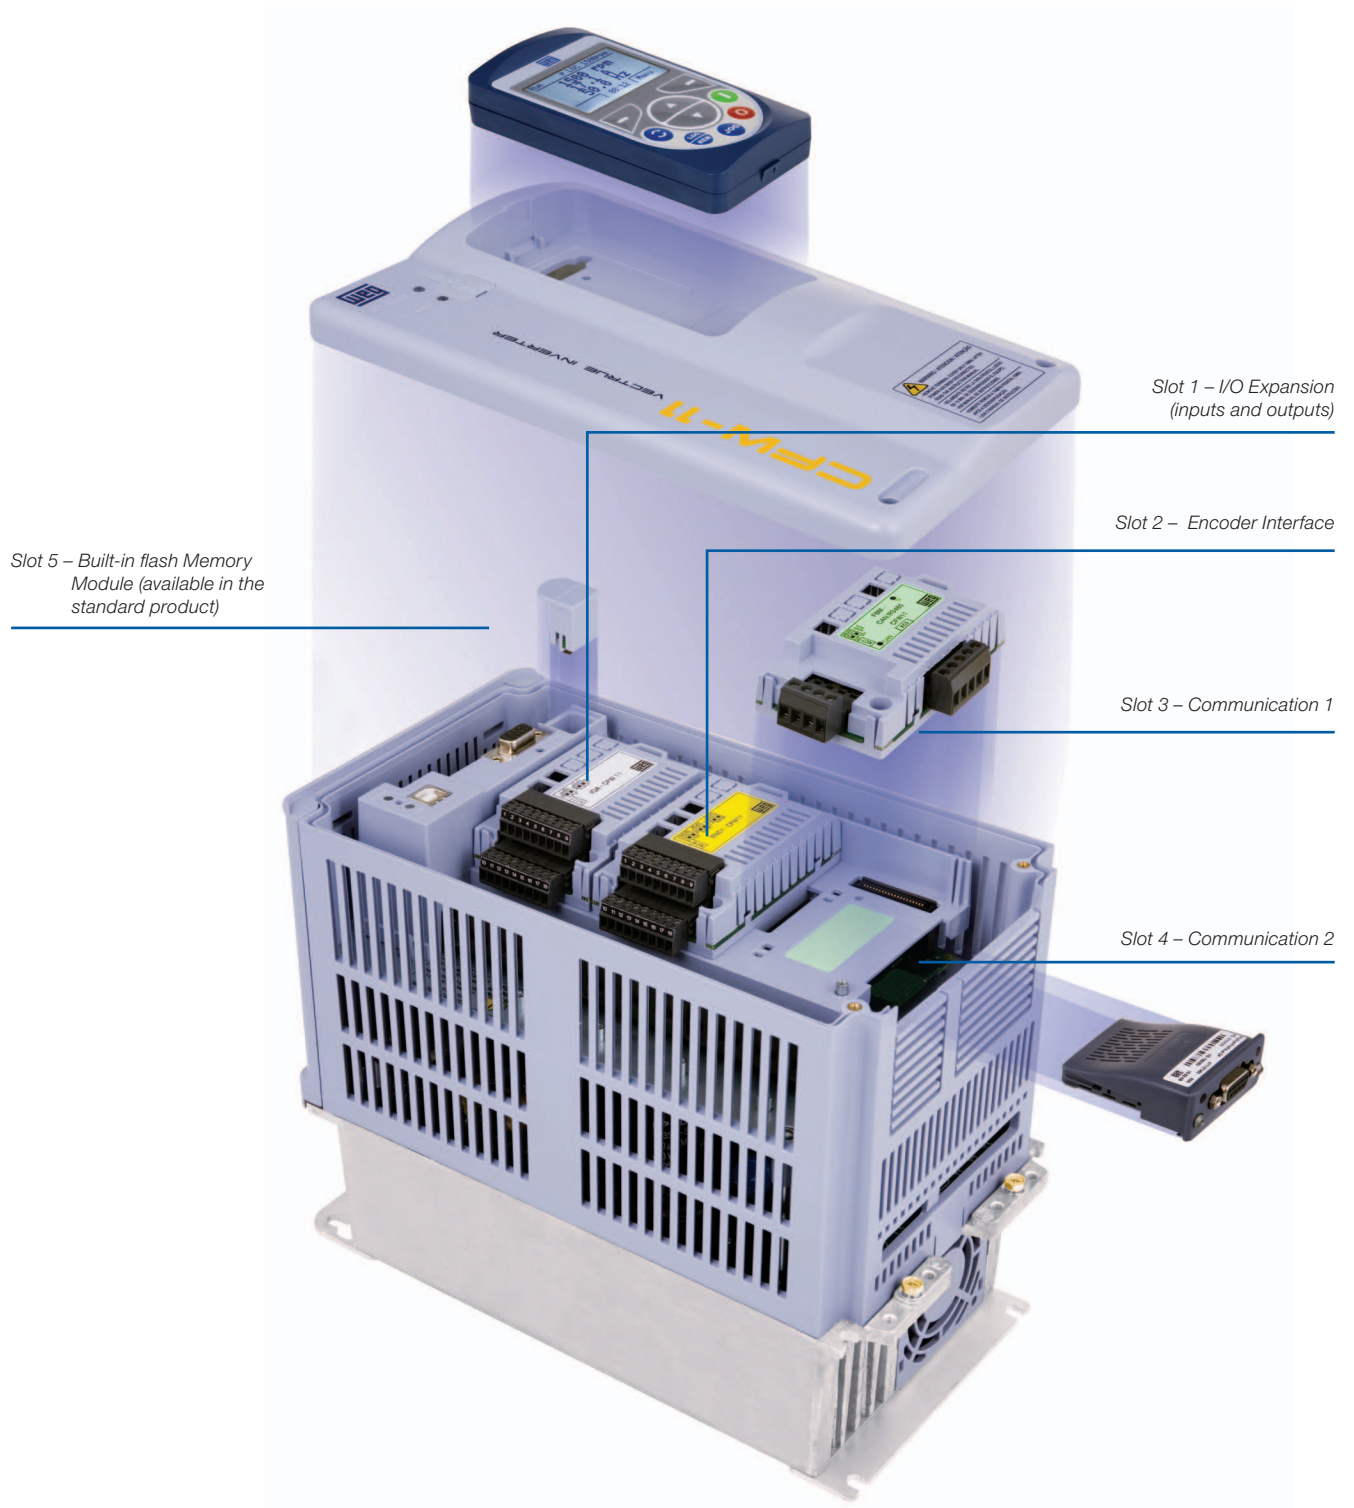



## Accessories

	Name	Description	Slot	Appearance
I/O Expansion	IOA-01	2 14-bit analog inputs in voltage or current 2 digital inputs 2 14-bit analog outputs in voltage or current 2 open collector digital outputs	1	
	IOB-01	2 isolated 12-bit analog inputs 2 digital inputs 2 isolated 11-bit analog outputs in voltage or current 2 open collector digital outputs	1	
Interface with Encoder	ENC-01	Incremental encoder module 5 to 12 Vdc 100 kHz With encoder signal repeater	2	
	ENC-02	Incremental encoder module 5 to 12 Vdc 100 kHz	2	
Communication	RS485-01	RS-485 Serial Communication Module (Modbus-RTU)	3	
	RS232-01	RS-232C Serial Communication Module (Modbus-RTU)	3	
	RS232-02	RS-232C Serial Communication Module with DIP-switches for microcontroller's flash memory programming.		
	CAN/RS485-01	CAN/RS-485 Interface Module (CANopen, DeviceNet and Modbus)	3	
	CAN-01	CAN Interface Module (CANopen and DeviceNet)	3	
	Profibus DP-01	Profibus DP Interface Module	3	
	RS232-05	RS-232 Interface Module (passive) (Modbus-RTU)	4	
	RS485-05	RS-485 Interface Module (passive) (Modbus-RTU)	4	
	PROFDP-05	Profibus DP Interface Module	4	
	DEVICENET-05	DeviceNet Interface Module	4	
	ETHERNET/IP-05	EtherNet/IP Interface Module	4	
PLC Functions	PLC11-01	Module with PLC Functions (see page 14)	1,2 and 3	
	PLC11-02	Module with PLC Functions (see page 14)		

## Accessories

### Kit for power cable shielding

CFW-11 has a kit to make easier the connection of the motor cable shield to the ground, providing a low-impedance connection for high frequencies.

Name	Description
PCSA-01	Kit for power cable shielding for frame size A
PCSB-01	Kit for power cable shielding for frame size B
PCSC-01	Kit for power cable shielding for frame size C
PCSD-01	Kit for power cable shielding for frame size D
PCSE-01	Kit for power cable shielding for frame size E

Note: 1) The kit for power cable shielding is provided PCSD-01, PCSE-01 along with VSDs that have internal RFI filter.

Example: EU CFW11 0007 T 2 O FA Z

2) In frame sizes D and E the power cable shielding kit is factory standard, even for VSDs without internal RFI filter;

3) NA for frame sizes F and G.



### Enclosures

Standards	Ratings	Frame Sizes					
		A	B	C	D	E	F & G
IEC	IP20	-	-	-	X	X	X
	IP21	X	X	X	KIP21D-01	-	-
NEMA	TYPE 1	KN1A-01	KN1B-01	KN1C-01	X	KN1E-01 / KN1E-02	KN1F-01 / KN1G-01

(X) Standard

(-) NA

Name	Description
KN1A-01	Conduit kit for frame size A
KN1B-01	Conduit kit for frame size B
KN1C-01	Conduit kit for frame size C
KIP21D-01	Conduit kit for frame size D
KN1E-01	NEMA type 1 kit for frame size E models CFW110142T2, CFW110105T4 and CFW110142T4
KN1E-02	NEMA type 1 kit for frame size E models CFW110180T4 and CFW110211T4
KN1F-01	Conduit kit for frame size F
KN1G-01	Conduit kit for frame size G

Note: In the KN1X-01 Conduit kit (frame sizes A, B and C) power cable shielding is also provided  
Kits KN1F-01 and KN1G-01 are under UL certification process



### Safety stop in accordance with EN-954-1, category III

With the activation of the safety stop function, the PWM pulses of the IGBTs are disabled. Since no voltage is available in the VSD output, no torque is applied to the motor. Thus, it is ensured that the motor remains stopped providing system safety (pending certification).



## Accessories

### Blank cover – HMID - 01<sup>1</sup>

Blank cover to replace the standard VSD keypad when not used.




### Remote keypad frame – RHMIF-01

Frame for Keypad installation on panel door or machine console.  
Degree of protection IP56.



### External control supply in 24 Vdc<sup>1</sup>

Used with communication networks (Profibus DP, DeviceNet, EtherNet/IP, etc.) so that the control circuit and the interface for the communication network continue working even if the AC supply is removed.




### RFI suppressor filter<sup>1</sup> (for the VSD to be in accordance with EN 61800-3 and EN 55011)

CFW-11 models with built-in RFI filter, when properly installed, meet the requirements of the electromagnetic compatibility directive – “EMC Directive 2004/108/EC”.

Example: EU CFW11 0007 T 2 O FA Z

For models from frame size A to D, the RFI filter is optional. But for models in frame size E, the RFI filter is included in the standard product.



<sup>1</sup> These options must be provided already installed in the CFW-11 (please see coding on page 26).

## Accessories


### PLC Accessory - PLC11

PLC11 accessory provides the CFW-11 with PLC, speed reference generator and motion control functions. It comes in two options: PLC11-01 and PLC11-02 (see differences in the table below). In many applications, this accessory allows the CFW-11 to replace an external PLC, reducing this way application costs.



#### Features:


- Motion control with trapezoidal “S” profiles (absolute and relative)
- Machine initial position search (homing)
- Ladder programming through WLP Software with timers, counters, coils and contacts
- RS-485 serial interface with Modbus-RTU protocol
- 100 configurable parameters available to the user via keypad or WLP
- Master/Slave function (Electronic Gearbox)
- CAN interface for CANopen and DeviceNet protocols
- CANopen Master, which allows CFW-11 to control up to 25 slave devices
- WLP/ WSCAN software: network configuration and programming software in the same environment.

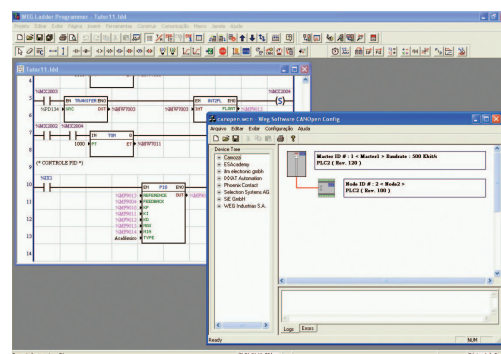

#### Technical Specification

Input and Outputs	PLC11-01	PLC11-02
Digital inputs	9 bidirectional isolated inputs: 24Vdc	4 bidirectional isolated inputs: 24Vdc
Digital outputs	3 bidirectional isolated open-collector outputs: 24Vdc, 500mA	3 bidirectional isolated open-collector outputs: 24Vdc, 500mA
Relay outputs	3 outputs NO contacts: 250Vac, 3A	1 output NO contact: 250Vac, 3A
Encoder inputs	2 incremental encoder inputs: 5...12Vdc, 500mA, internal	2 incremental encoder inputs: 5...12Vdc, 500mA, internal
RS-485 serial interface	1 port for Modbus-RTU protocol	1 port for Modbus-RTU protocol
CAN interface	1 port for CANopen and DeviceNet protocols	1 port for CANopen and DeviceNet protocols
Analog inputs	1 differential input: -10...+10Vdc / 0...20mA, 14 bits	-
Analog outputs	2 outputs: -10...+10Vdc / 0...20mA, 12 bits	-

#### Example of use of PLC11-01 as CANopen network master

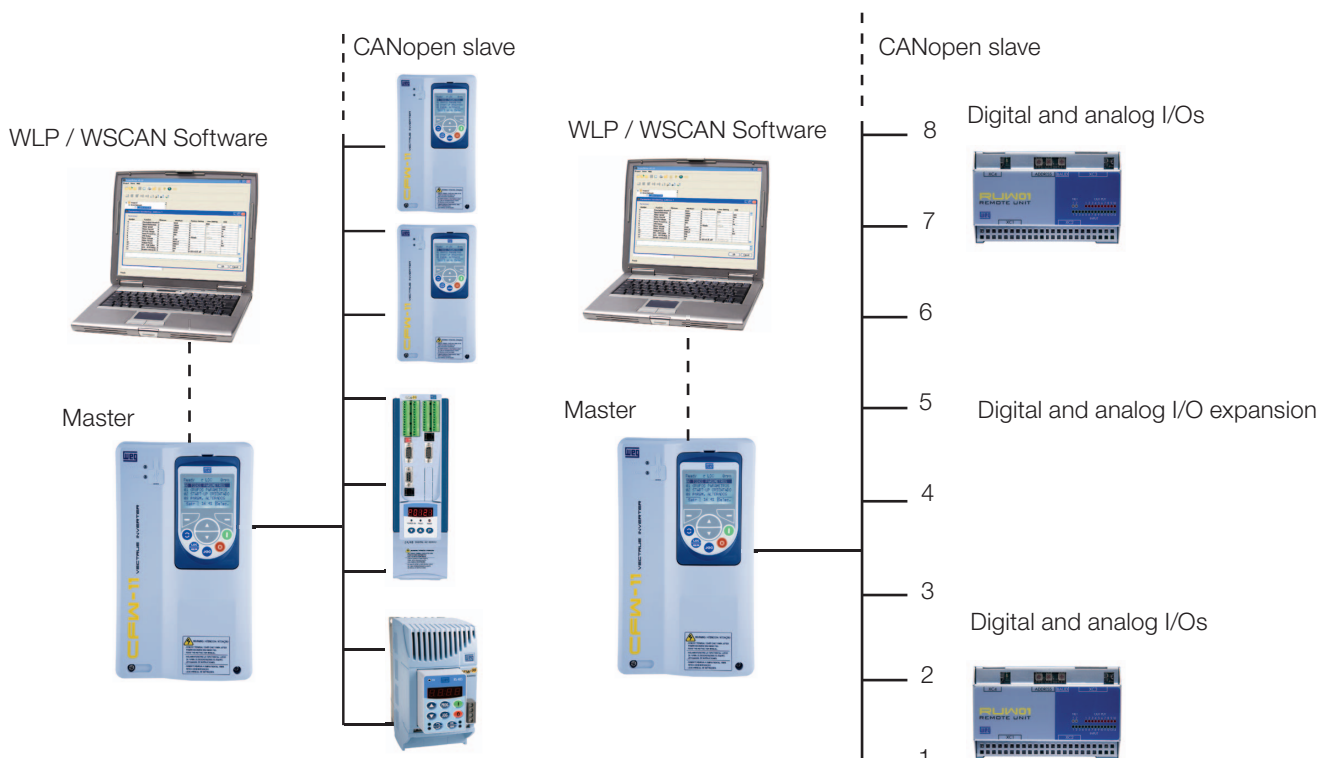

## CFW-11 IP54 Drive

The CFW-11 IP54 features an IP54 enclosure that protects the drive from splashing water, corrosion and dust.

The improved cooling fans on the CFW-11 IP54 ensure perfect functionality when operating at maximum loading capacity.


The drive is designed to be mounted directly without the need for a custom enclosure in severe environments such as:

- Chemical Industry
- Petrochemical Industry
- Food Industry

Communication Protocol such as Profibus, Devicenet, CAN open, Modbus-RTU, Ethernet IP can be added using optional cards.



## CFW-11 Multipump Control Function

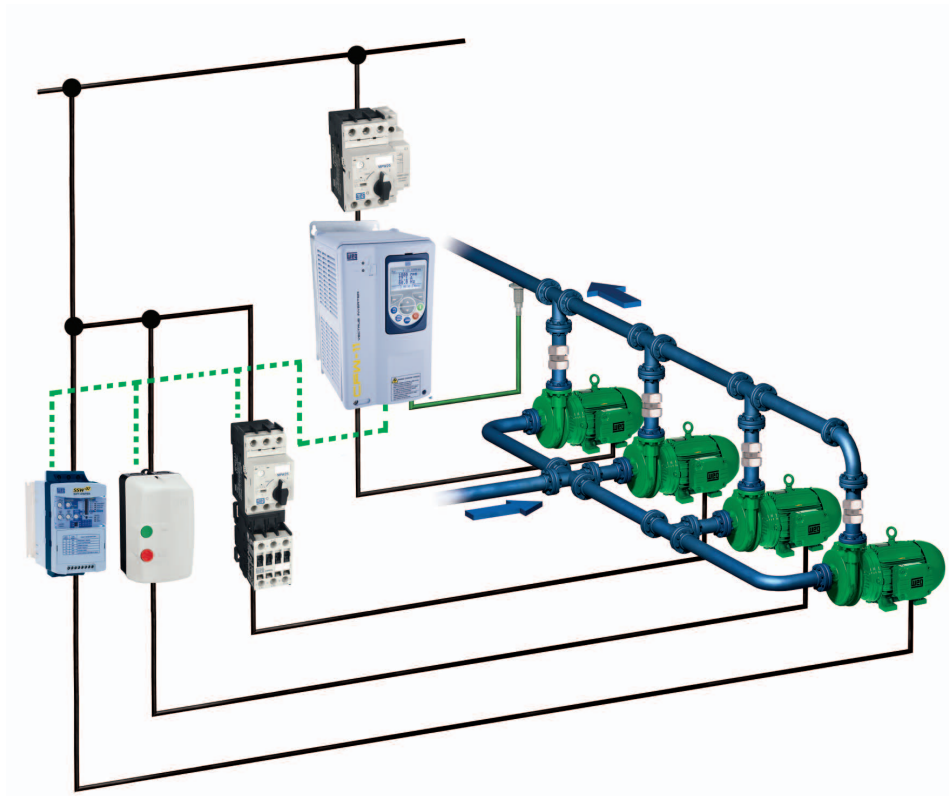

The CFW-11 features the Multipump Control function which is capable of controlling up to 5 pumps in order to maintain the pipeline pressure constant regardless of the outflow fluctuations.

In this system, an control algorithm of pumps is done by the VSD, which decides the moment to start or stop each of the pumps based on the outflow demand. Besides that, the VSD also monitors the suction pressure and the tank level.

The CFW-11 also alternates the pumps according to their using time, thus ensuring an uniform wear and tear of motors and pumps.

Two types of Multipump Control are available: fixed and floating controls. In fixed control, the VSD is able to control one of the pumps at variable speed and to start and stop other 4 pumps at fixed speed. In floating control, the VSD is able to control up to 4 pumps, all of them at variable speed.




## USB Connection

### SuperDrive G2


It is a Windows-based software for CFW-11 programming, command and monitoring. The following features are available in the software:

- Automatic CFW-11 identification
- Monitoring of CFW-11 parameters
- Online changing of parameters in the CFW-11
- Offline changing of parameters in the PC
- Creation of application documents
- Trace function (see below)
- Upload of SoftPLC applicative software in the CFW-11 flash memory (see page 17)
- Online troubleshooting


This software is available free of charge at [www.weg.net](http://www.weg.net)




Monitoring and parameterization of the list of parameters. Comparison to factory default is easy.




Integrated environment



Monitoring and command window using virtual Keypad. Start/Stop function, JOG, local / remote, Reverse and reset



Parameter setting



Status monitoring


### Trace Function

Trace function is used to register CFW-11 variables (like current, voltage, speed, etc.) when a given event occurs in the system (eg.: alarm / fault, overload, overvoltage, etc.).


This event in the system is called a trigger because it triggers the data storage process.

The stored variables can be visualized in the form of graphs by using the SuperDrive G2 software. Trace function simulates a 4-channel oscilloscope.

It is a very useful tool in the start-up of a system and in the diagnoses of defects.

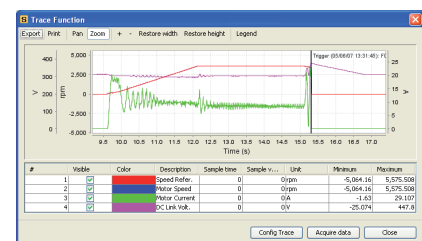

Example of graph visualization screen

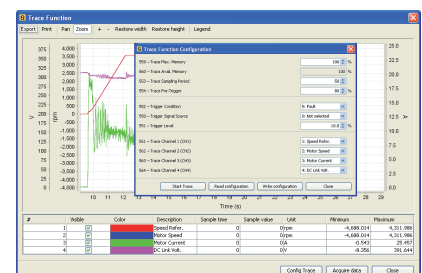


Trace function configuration in the SuperDrive G2

## USB Connection

### SoftPLC Function

It is a resource that provides PLC features to the CFW-11 without the addition of any accessories. It provides flexibility to the product, allowing the user to create his/her own applicative software (user's program). The SoftPLC main features are:

- Ladder language programming using WLP software
- Access to all VSD parameters and I/Os
- Configurable PLC, mathematical and control blocks
- Applicative software download, upload and online monitoring via USB connection
- Storage of the applicative software in the CFW-11 Flash
- Memory Module (see below)
- Memory space of 15kB for applicative storage

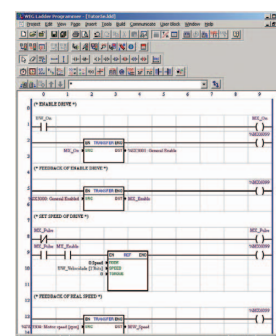

Simple and practical programming environment


- 40 User parameter settings that can be individually programmed allowing tags, units, minimum and maximum values, number of decimal digits and other characteristics to be changed.

Parameter	Tag	Unit	Minimum	Maximum	D...	H...	R...	S...	I...	S...	R...	F...
P1010	Uw_On		0	32767	0	0	0	0	0	0	1	0
P1011	Uw_Velocidade		0	32767	0	0	0	0	0	0	1	0
P1012	Parametro PLC		0	32767	0	0	0	0	0	0	1	0
P1013	Parametro PLC		0	32767	0	0	0	0	0	0	1	0
P1014	Parametro PLC		0	32767	0	0	0	0	0	0	1	0
P1015	Parametro PLC		0	32767	0	0	0	0	0	0	1	0
P1016	Parametro PLC		0	32767	0	0	0	0	0	0	1	0
P1017	Parametro PLC		0	32767	0	0	0	0	0	0	1	0
P1018	Parametro PLC		0	32767	0	0	0	0	0	0	1	0
P1019	Parametro PLC		0	32767	0	0	0	0	0	0	1	0
P1020	Parametro PLC		0	32767	0	0	0	0	0	0	1	0
P1021	Parametro PLC		0	32767	0	0	0	0	0	0	1	0
P1022	Parametro PLC		0	32767	0	0	0	0	0	0	1	0
P1023	Parametro PLC		0	32767	0	0	0	0	0	0	1	0

### Flash Memory Module

- It stores the image of the CFW-11 parameters. It ensures that the programming will not be lost because there is a backup of the parameters.
- It permits the transfer of parameters stored in the flash Memory Module to the CFW-11 and vice versa. Excellent function for machine manufactures or in processes where parameter settings is repeated (Copy Function).
- It stores the applicative software generated by the SoftPLC function.

### Standard on CFW11 series

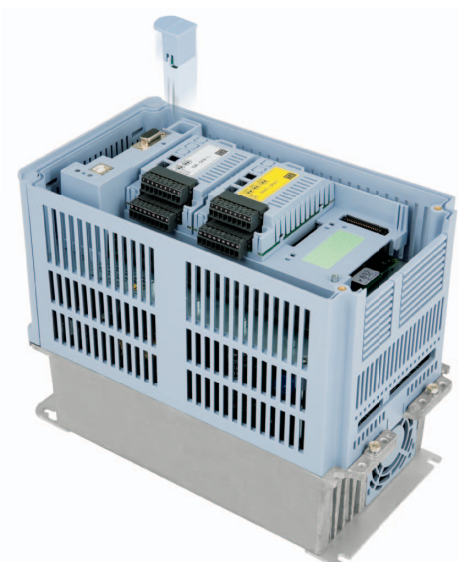

## Technical Features

### Built-in DC link Reactor

- Allows the VSD to be installed in any network (there is no minimum impedance restriction).
- Typical power factor for rated condition:  
0.94 for models with three-phase supply  
0.70 for models with single-phase or single-phase/three-phase supply
- Meets the 61000-3-12 standard, related to low order current harmonics in the network.


### No need for external line reactor

### Single DC Busbar

Usually used in multi-motor systems, common DC bus configuration is a good solution for energy savings.


In this configuration, individual VSD rectifier bridges are replaced with a common input rectifier unit. Each VSD is then directly fed from the DC bus to its DC link terminals.

This solution allows the energy in the DC bus to be shared among the VSDs connected to it, thus optimizing the power consumption in the system. The standard CFW-11 can be connected to a DC bus system. (When required the factory should be consulted for further details)

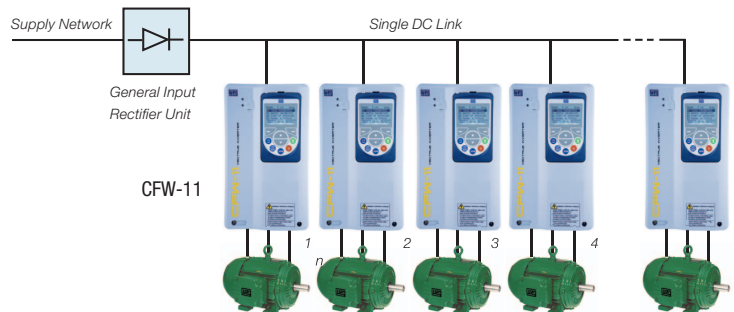

### Intelligent Thermal Management

- Monitoring of the heatsink and internal air temperatures of the electronic boards providing total protection of the IGBTs and the CFW-11 as a whole.
- The heatsink fan is turned on and off automatically, depending on the temperature of the power modules.
- The speed and the number of hours of operation of the fan are monitored and indicated in corresponding parameters. Alarm or fault messages are generated related to these variables.
- The fan is easily removed for cleaning or replacement.


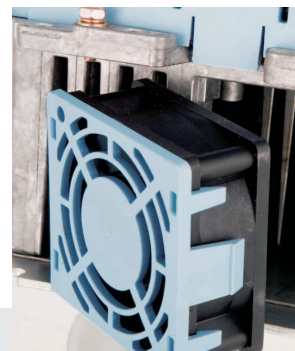


### Functions

- Multi-speed: up to 8 pre-programmed speeds.
- PID regulator: automatic control of level, pressure, flow, weight, etc.
- Ride-Through: operation during momentary Loss of the power of the power supply.
- Skip Frequency: rejection of critical or resonant speeds.
- S Ramp: smoothness in the acceleration / deceleration.

- All CFW-11 models from size A to D have built-in braking IGBT in the standard product;
- CFW-11 size E the braking IGBT is optional built-in;
- CFW-11 sizes F and G, Braking IGBT is optional with the external DBW module;
- CFW-11 can monitor the temperature probes of the motor (PTC, PT100 OR KTY84), providing thermal protection to the motor (optional accessory is necessary);
- Operating air temperature up to 50° C (122° F) for sizes A to D, and up to 45° C (113° F) for size E;
- Motor overload protection according to IEC 60497-4-2 and UL 508 C.

## Technical Features

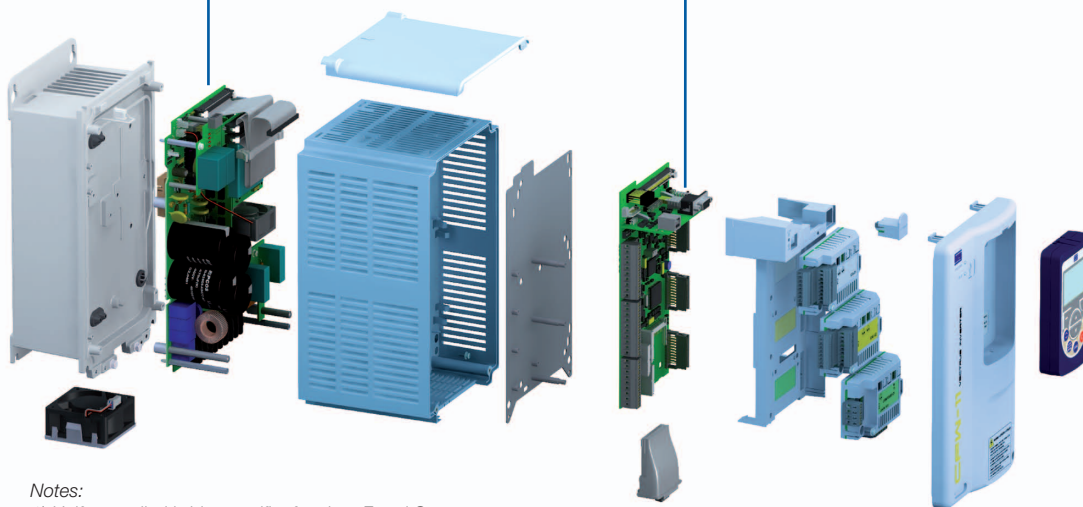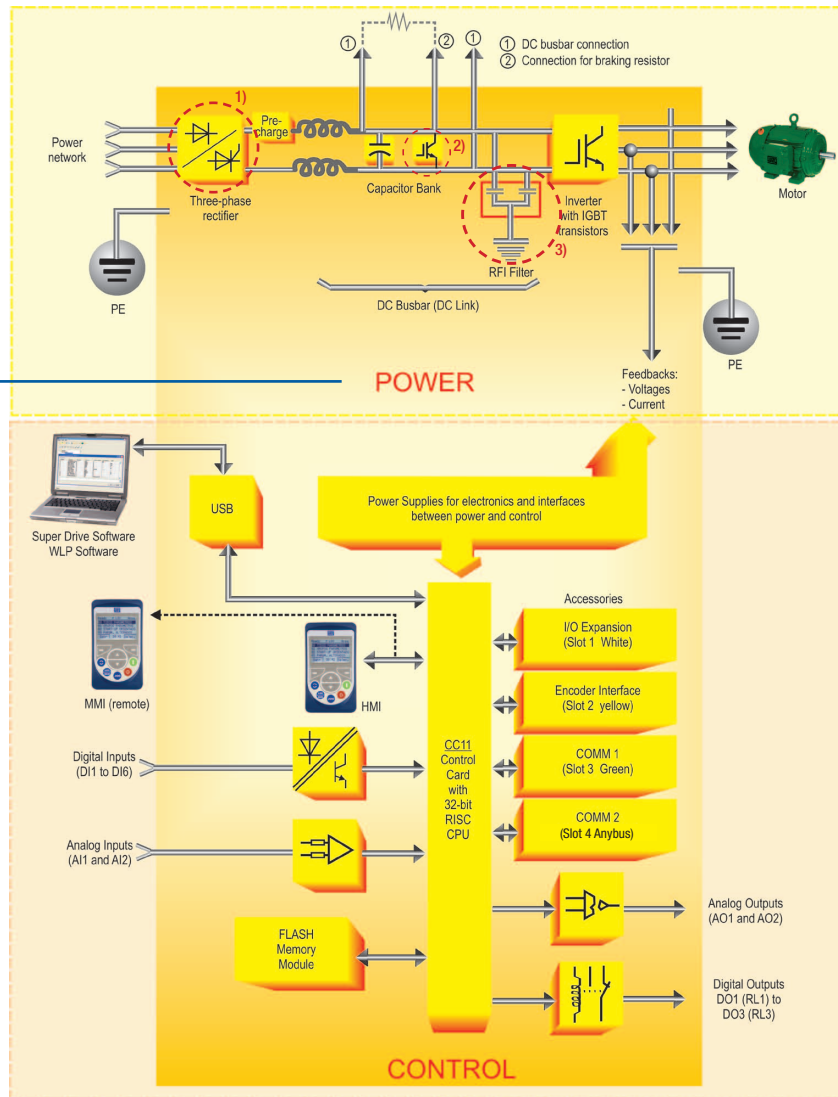

Notes:

- 1) Half controlled bridge rectifier for sizes F and G;
- 2) Standard for sizes A to D;
- 3) Standard RFI filter for sizes E, F and G;

Please refer to the user manual for more information.

## Drive Ratings

### Normal Duty (ND) Cycle:

- 110% during 60 seconds every 10 minutes
- 150% during 3 seconds every 10 minutes

### Heavy Duty (HD) Cycle:

- 150% during 60 seconds every 10 minutes
- 200% during 3 seconds every 10 minutes

### Sizing the drive:

The correct way to select a VSD is matching its output current with the motor rated current. However, the tables below present the expected motor power for each VSD model.

Use the motor power ratings below only as a guidance. Motor rated currents may vary with speed and manufacturer.

IEC motor powers are based on WEG 4-pole motors, NEMA motor powers are based on NEC table 430-150.

### Motor voltages between 220V and 230V:

Power Supply	Model	Normal Duty (ND)	IEC		NEMA		Heavy Duty (HD)	IEC		NEMA	
			50 Hz 220 V 230 V		60 Hz 230 V			50 Hz 220 V 230 V		60 Hz 230 V	
		A	kW		HP		A	kW		HP	
200-240 V	10	CFW110006S2	6	1.1	1.5		5	1.1		1	
		CFW110007S2	7	1.5	2		7	1.5		2	
		CFW110010S2	10	2.2	3		10	2.2		3	
	1/30	CFW110006B2	6	1.1	1.5		5	1.1		1	
		CFW110007B2	7	1.5	2		7	1.5		2	
	30	CFW110007T2	7	1.5	2		5.5	1.1		1	
		CFW110010T2	10	2.2	3		8	1.5		2	
		CFW110013T2	13	3	3		11	2.2		3	
		CFW110016T2	16	4	5		13	3		3	
		CFW110024T2	24	5.5	7.5		20	5.5		5	
		CFW110028T2	28	7.5	10		24	5.5		7.5	
		CFW110033T2	33.5	9.2	10		28	7.5		10	
		CFW110045T2	45	11	15		36	9.2		10	
		CFW110054T2	54	15	20		45	11		15	
		CFW110070T2	70	18.5	25		56	15		20	
		CFW110086T2	86	22	30		70	18.5		25	
		CFW110105T2	105	30	40		86	22		30	
220-230V	30	CFW110142T2	142	37	50		115	30		40	
		CFW110180T2	180	55	60		142	37		50	
		CFW110211T2	211	55	75		180	55		60	

### Motor voltages between 380V and 460V:

			Normal Duty (ND)	IEC		NEMA	Heavy Duty (HD)	IEC		NEMA
				50 Hz 380 V 415 V	60 Hz 440 V 460 V	60 Hz 460 V		50 Hz 380 V 415 V	60 Hz 440 V 460 V	60 Hz 460 V
Power Supply		Model	A	kW	HP	HP	A	kW	HP	HP
380-480 V	30	CFW110003T4	3.6	1.5	2	2	3.6	1.5	2	2
		CFW110005T4	5	2.2	3	3	5	2.2	3	3
		CFW110007T4	7	3	4	3	5.5	2.2	3	3
		CFW110010T4	10	4	7.5	5	10	4	7.5	5
		CFW110013T4	13.5	5.5	10	7.5	11	4	7.5	7.5
		CFW110017T4	17	7.5	12.5	10	13.5	5.5	10	7.5
		CFW110024T4	24	11	15	15	19	9.2	12.5	10
		CFW110031T4	31	15	20	20	25	11	15	15
		CFW110038T4	38	18.5	30	25	33	15	25	20
		CFW110045T4	45	22	30	30	38	18.5	30	25
		CFW110058T4	58.5	30	40	40	47	22	30	30
		CFW110070T4	70.5	37	50	50	61	30	50	40
		CFW110088T4	88	45	75	60	73	37	60	50
		CFW110105T4	105	55	75	75	88	45	75	60
		CFW110142T4	142	75	100	100	115	55	75	75
		CFW110180T4	180	90	150	150	142	75	100	100
		CFW110211T4	211	110	175	150	180	90	150	150
		CFW110242T4	242	110	200	200	211	110	150	150
		CFW110312T4	312	160	250	250	242	110	200	200
		CFW110370T4	370	185	300	300	312	160	250	250
		CFW110477T4	477	250	400	400	370	185	300	300
		CFW110515T4	515	250	400	450	477	250	400	400
		CFW110601T4	601	315	500	500	515	250	400	450
		CFW110720T4	720	370	600	600	560	300	450	450




## Dimensions and Weight

	NEMA 1 / IP21					IP54													
Model	Size	Dimensions mm (in)			Weight kg (lb)	Size	Dimensions mm (in)			Weight kg (lb)	Braking IGBT								
		High (H)	Width (W)	Depth (D)			High (H)	Width (W)	Depth (D)										
CFW110006S2	A	247 (9.73)	145 (5.71)	227 (8.94)	6.3 (13.9)	1	410 (16.14)	255 (10.04)	235 (9.25)	10 (22.0)	Standard								
CFW110006B2																			
CFW110007S2																			
CFW110007B2																			
CFW110007T2																			
CFW110010S2																			
CFW110010T2																			
CFW110013T2																			
CFW110016T2																			
CFW110024T2	B	293 (11.54)	190 (7.48)	227 (8.94)	10.4 (22.9)	2	625 (24.61)	350 (13.78)	298 (11.73)	15 (33.1)									
CFW110028T2																			
CFW110033T2																			
CFW110045T2	C	378 (14.88)	220 (8.67)	293 (11.54)	20.5 (45.2)					2	625 (24.61)	350 (13.78)	298 (11.73)	36 (79.4)					
CFW110054T2																			
CFW110070T2																			
CFW110086T2	D	504 (19.84)	300 (11.81)	305 (12.01)	32.6 (71.8)									2	625 (24.61)	350 (13.78)	298 (11.73)	41 (90.4)	
CFW110105T2																			
CFW110142T2																			
CFW110180T2	E	675 (26.58)	335 (13.19)	358 (14.09)	65 (143.3)	-	-	-	-									-	Optional
CFW110211T2																			
CFW110003T4																			
CFW110005T4	A	247 (9.73)	143 (5.63)	196 (7.72)	6.3 (13.9)	1	410 (16.14)	255 (10.04)	235 (9.25)	10 (22.0)	Standard								
CFW110007T4																			
CFW110010T4																			
CFW110013T4																			
CFW110017T4																			
CFW110024T4	B	293 (11.54)	190 (7.48)	227 (8.94)	10.4 (22.9)	2	625 (24.61)	350 (13.78)	298 (11.73)	15 (33.1)									
CFW110031T4																			
CFW110038T4																			
CFW110045T4	C	378 (14.88)	220 (8.67)	293 (11.54)	20.5 (45.2)					2		625 (24.61)	350 (13.78)	298 (11.73)	36 (79.4)				
CFW110058T4																			
CFW110070T4																			
CFW110088T4	D	504 (19.84)	300 (11.81)	305 (12.01)	32.6 (71.8)						3				875 (34.45)	400 (15.75)	374 (14.72)	41 (90.4)	
CFW110105T4																			
CFW110142T4																			
CFW110180T4	E	675 (26.58)	335 (13.19)	358 (14.09)	65 (143.3)	3	875 (34.45)	400 (15.75)	374 (14.72)									80 (276)	Optional
CFW110211T4																			
CFW110242T4																			
CFW110312T4	F	1200 (47.24)	430 (16.93)	360 (14.17)	140 (308.65)					-		-	-	-				-	Optional
CFW110370T4																			
CFW110477T4																			
CFW110515T4	G	1225 (48.23)	535 (21.06)	426 (16.77)	215 (473.99)					-	-	-	-	-	Optional				
CFW110601T4																			
CFW110720T4																			



# Mechanical Mounting

## Standard Installation

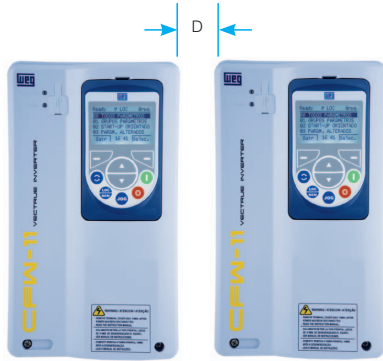

Frame Size	Minimum Mounting Clearance			
	A mm (in)	B mm (in)	C mm (in)	D mm (in)
A	25 (0.98)	25 (0.98)	10 (0.39)	30 (0.39)
B	40 (1.57)	45 (1.57)	10 (0.39)	30 (0.39)
C	110 (4.33)	130 (5.12)	10 (0.39)	30 (0.39)
D	110 (4.33)	130 (5.12)	10 (0.39)	30 (0.39)
E, F and G	150 (5.91)	250 (9.84)	20 (0.78)	80 (3.15)

When one VSD is assembled on the top of another, use the distance A+B and deflect the hot air coming from the VSD below.

## Side by side Installation




For Frame Size A, B and C: side by side assembly without lateral spacing and with the removal of the top cover.




## Mechanical Installation | Panel Assembly

### Surface Assembly

Frame Size	a2 mm (in)	b2 mm (in)	c2 mm (in)
A	115 (4.53)	250 (9.85)	M5
B	150 (5.91)	300 (11.82)	M5
C	150 (5.91)	375 (14.77)	M6
D	200 (7.88)	525 (20.67)	M8
E	200 (7.88)	650 (25.60)	M8
F	150 (5.91)	1200 (47.24)	M10
G	200 (7.87)	1225 (48.23)	M10



Sizes A up to E

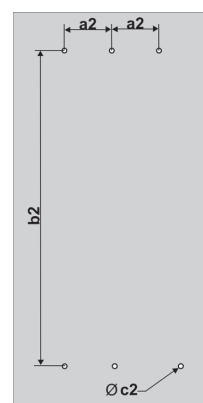


Sizes F and G

### Flange Assembly (IP-54 rated when mounting the heat-sink outside the enclosure)

\* For Sizes F and G the inverter area that will be outside the panel has only IP20 protection degree.

Frame Size	a3 mm (in)	b3 mm (in)	c3 mm (in)	d3 mm (in)	e3 mm (in)
A	130 (5.12)	240 (9.45)	M5	135 (5.32)	225 (8.86)
B	175 (6.84)	285 (11.23)	M5	179 (7.05)	271 (10.65)
C	195 (7.68)	365 (14.38)	M6	205 (8.08)	345 (13.59)
D	275 (10.83)	517 (20.36)	M8	285 (11.23)	485 (19.10)
E	275 (10.83)	635 (25.00)	M8	315 (12.40)	615 (24.21)
F	350 (13.78)	1185 (46.61)	M10	391 (15.39)	1146 (45.12)
G	400 (15.75)	1220 (48.03)	M10	495 (19.49)	1182 (46.53)



## Technical Data

Power supply and Power Range		
Voltage and power range	Single Phase	200-240Vac / +10% - 15% 1.5 to 3 HP (1.1 to 2.2 kW)
	Three Phases	200-240Vac / + 10% -15%: 1.5 to 75 HP (1.1 to 55 kW)
		380-480Vac / + 10% -15%: 2 to 600 HP (1.5 to 370 kW)
Frequency	50...60 Hz +/-2% (48 to 63 Hz)	
Displacement factor	Greater than 0.98	
Efficiency	Greater than 0.97	
Power factor	0.94 for three-phase input at rated condition 0.70 for single-phase input at rated condition	

Inverter Output		
Voltage range	Three Phase, 0 up to power supply voltage	
Frequency range	0 to 3.4x motor rated frequency (*)	
Switching Frequency	Standard: 5 kHz (frame sizes A, B, C, D); 2,5 kHz (frame sizes E and F); 2 kHz (frame size G) Options available 2.5 / 5 / 10 kHz	
Overload	Normal Duty Cycle	110% for 1 min every 10min
		150% for 3 sec every 10min
	Heavy Duty Cycle	150% for 1 min every 10min
		200% for 3 sec every 10min
Time (ramps)	Acceleration	0 to 999 seconds
	Deceleration	0 to 999 seconds

Environment	
Temperature of Operation	-10 to 50°C (14 to 122°F) for frame Size A,B,C and D -10 to 45°C (14 to 113°F) for frame Size E, F and G models
	Up to 60°C (140°F) for frame Size A,B,C,D and 55°C (133°F) for frame Size E with current derating (2% for each 1°C above rated value or 1.1% for each 1°F above rated value)
	rated value or 1.1% for each 1°F above rated value
Humidity	5 to 90% without condensation
Altitude	0 to 1000 meters
	Up to 4000 meters with current reduction (1% for every 100 meters above 1000 meters)

Protection Degree	
IP20	Frame Size A, B and C without upper cover and conduit kit and frame size E without conduit kit
NEMA 1 / IP20	Frame Size D without IP21 kit Frame size E with conduit kit
IP21	Frame Size A, B and C with upper cover and conduit kit
NEMA 1 / IP21	Frame Size A, B and C with upper cover and conduit kit
	Frame Size D with IP21 kit

Braking Methods	
Rheostatic Braking	Supply available to user (standard for frame size A, B, C and D and option for frame size E)
	External braking resistor (not provided)
Optimal Braking	Does not need braking resistor
DC Braking	Direct current applied to the motor

Performance		
V/f	Speed Control	Regulation: 1% of rated speed
		Speed variation range: 1:20
Voltage Vector (VVW)		Regulation: 1% of rated speed
		Speed variation range: 1:30
Sensorless Vector		Regulation: 0.5% of rated speed
		Speed variation range: 1:100
Vector with Encoder (with accessory ENC-01 or ENC-02)		Regulation: +/- 0.01% of rated speed with 14-bit analog input (IOA)
		Regulation: +/- 0.01% of rated speed with digital reference (keyboard, serial fieldbus, electronic potentiometer, multispeed)
		Regulation: +/- 0.05% of rated speed with 12-bit analog input
	Torque Control	Range: 10 to 180%
		Regulation: +/- 5% of rated torque
Sensorless Vector		Range: 20 to 180%
		Regulation: +/-10% of rated torque (above 3 Hz)

Inputs and Outputs (I/Os) in the Standard Product		
Inputs	Digital	6 isolated inputs, 24 Vdc, programmable functions
	Analog	2 differential inputs isolated by differential amplifier, programmable functions
		Resolution: - AI1: 12 bits - AI2: 11 bits + signal
		Signals: 0 to 10Vdc, 0 to 20mA or 4 to 20mA
		Impedance: - 400 kΩ for signal 0 to 10Vdc - 500 Ω for signal 0 to 20mA or 4 to 20mA
Outputs	Relay	3 relays with NO / NC contacts, 240 Vac / 1A, programmable functions
	Analog	2 isolated outputs, programmable functions
		Resolution: 11 bits
		Load: 0 to 10 V: $R_L \geq 10 \text{ k}\Omega$ 0 to 20 mA or 4 to 20 mA: $R_L < 500\Omega$
Available supply to user		24 Vdc + -20%, 500 mA

(\*) This maximum value can change according to the used control mode and switching frequency. The maximum permissible speed is 1800rpm.

## Technical Data

Communication	
Profibus DP	PROFIBUS DP-05 (slot 3 and 4)
DeviceNet	CAN/RS485-01 (slot 3)
	CAN-01 (slot 3)
	DEVICENET-05 (slot4)
CANopen	CAN/RS485-01 (slot 3)
	CAN-01 (slot 3)
CANopen Master/Slave	PLC11-01 1, 2 and 3
Ethernet TCP/IP	ETHERNET/IP-05 (slot 4)
ModBus RTU (RS-485)	RS485-01 (slot 3)
	CAN/RS485-01 (slot 3)
	RS485-05 (slot 4)
ModBus RTU (RS-232)	RS232-01 (slot 3)
	RS232-05 (slot 4)
USB	Built into the standard product
	Communication with SuperDrive G2 Software
	Communication with WLP Software used for programming and monitoring the SoftPLC function and the PLC11 accessories

Protections
Overcurrent / short circuit
Under / overvoltage in the power circuit
Phase loss
Overtemperature in the VSD (IGBTs, rectifier and internal air in the electronic cards)
Overtemperature in the motor
Overload in the braking resistor
Overload in the IGBTs
Overload in the motor
Fault / external alarm
Fault in the CPU or memory
Phase-to-ground short circuit at the output
Fault in the heatsink fan
Overspeed of motor
Incorrect connection of encoder

Safety Standards
UL 508C Power conversion equipment
UL 840 Insulation coordination including clearances and creepage distances for electrical equipment
EN 61800-5-1 Safety requirements electrical, thermal and energy
EN 50178 Electronic equipment for use in power installations
EN 60204-1 Safety of machinery. Electrical equipment of machines. Part 1: General requirements. Note: In order to have a machine in conformity with this norm, the machine manufacturer is responsible for the installation of an emergency shutdown device and an equipment for network sectioning
EN 60146 (IEC 146) Semiconductor converters
EN 61800-2 Adjustable speed electrical power drive systems – Part 2: General requirements – rating specifications for low voltage adjustable frequency a.c. power drive systems

Mechanical Construction Standards
EN 60529 - Degrees of protection provided by enclosures (IP Code)
UL 50 - Enclosures for electrical equipment

Electromagne Compatibility Standards (EMC)
EN 61800-3 - Adjustable speed electrical power drive systems Part 3: EMC product standard including specific test methods
EN 55011 - Limits and methods of measurement of radio disturbance characteristics of industrial, scientific and medical (ISM) radio-frequency equipment
CISPR 11 - Industrial, scientific and medical (ISM)radio-frequency equipment Electromagnetic disturbance characteristics Limits and methods of measurement
EN 61000-4-2 - Electromagnetic Compatibility Standards (EMC) Part 4: Testing and measurement techniques - Section 2: Electrostatic discharge immunity test
EN 61000-4-3 - Electromagnetic Compatibility Standards (EMC) Part 4: Testing and measurement techniques - Section 3:Radiated, radiofrequency, electromagnetic field immunity test
EN 61000-4-4 - Electromagnetic Compatibility Standards (EMC) Part 4: Testing and measurement techniques - Section 4: Electrical fast transient / burst immunity test
EN 61000-4-5 - Electromagnetic Compatibility Standards (EMC) Part 4: Testing and measurement techniques - Section 5: Surge immunity test
EN 61000-4-6 - Electromagnetic Compatibility Standards (EMC) Part 4: Testing and measurement techniques - Section 6: Immunity to conducted disturbances, induced by radio-frequency fields



# Coding

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
EU	CFW11	0016	T	4	S	—	—	—	—	—	—	—	—	Z

## 1 - Market identification

It defines the language of the manual and the factory parameterization

BR = Brazil

NA = North America

MS = Mercosul

EU = Europe

SA = South Africa

## 2 - Line

CFW11 = WEG Frequency VSD series CFW11

## 3- Rated output current for normal overload system

Supply	Single-phase (S)	Single-phase or Three-phase (B)	Three-Phase (T)		
	200 - 240 V (2)	200 - 240 V (2)	200-240 V (2)	380-480 V (4)	
Voltage	0010 = 10 A	0006 = 6 A 0007 = 7 A	0007 = 7 A	0003 = 3 A	0088 = 88 A
			0010 = 10 A	0005 = 5 A	0105 = 105 A
			0013 = 13 A	0007 = 7 A	0142 = 142 A
			0016 = 16 A	0010 = 10 A	0180 = 180 A
			0024 = 24 A	0013 = 13 A	0211 = 211 A
			0028 = 28 A	0017 = 17 A	0242 = 242 A
			0033 = 33 A	0024 = 24 A	0312 = 312 A
			0045 = 45 A	0031 = 31 A	0370 = 370 A
			0054 = 54 A	0038 = 38 A	0477 = 477 A
			0070 = 70 A	0045 = 45 A	0515 = 515 A
			0086 = 86 A	0058 = 58 A	0601 = 601 A
			0105 = 105 A	0070 = 70 A	0720 = 720 A
			0142 = 142 A		
			0180 = 180 A		
			0211 = 211 A		

## 4 – Number of phases

S = Single-phase

B = Single-phase or three-phase

T = Three-phase

## 5 - Voltage

2 = 200-240 V

4 = 380-480 V

## 6 - Optional Accessories

S = standard product

O = product with optional accessories

## 7 - Degree of Protection

Blank = factory standard

(Sizes A, B and C: IP21 - D: Nema 1/ IP20)

N1 = Nema 1

21 = IP21

## 8 - Keypad

Blank = factory standard (1)

IC = without interface (blind cover)

## 9 - Braking

Blank = factory standard

(Sizes A, B, C, D: built-in braking IGBT)

DB = with braking IGBT (valid for models of frame size E)

## 10 - RFI Filter

Blank = factory standard

FA = Category C3 internal RFI filter

(Valid for models of frame (size E: built-in RFI filter) Size A, B, C and D)

## 11 - Safety Stop

Blank = factory standard (without safety stop function)

Y = with safety stop function according to EN-954-1 category 3

## 12 - External Electronic Supply 24 Vdc

Blank = factory standard

W= With external electronic power supply 24Vdc

( Sizes A,B,C,D,E: Without external electronic power supply 24vdc in the standard product)

## 13 – Special hardware

Blank = factory standard (without)

H1 = special hardware nr. 1

## 14 – Special Software

Blank = factory standard (without)


S1 = special software nr. 1

## 15 – End of Code indicator digit

Z = end of code indicator


## CFW11M - Modular Drive

The CFW-11M (modular drive) is the new generation of WEG VSDs for large powers. It is available at power ratings from 400 to 2500 HP and voltages from 500 to 690 V, with 6 and 12 pulse input rectifier.

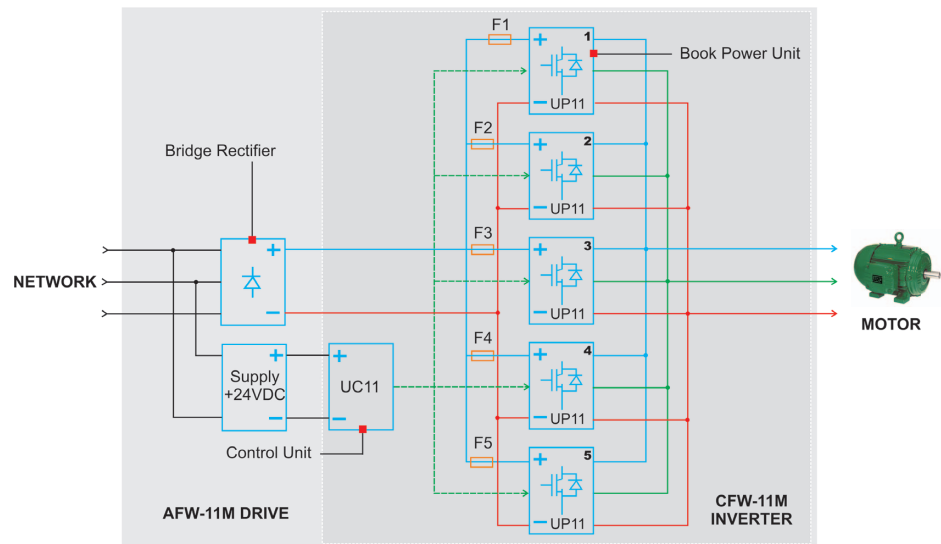

Notes: The fuses presented in the block diagram above are not included in the VSD CFW-11M, but are part of the AFW-11M drive  
Maximum AFW-11M configuration with 5 power units (2500 HP)

DC Link (connected to rectifier)

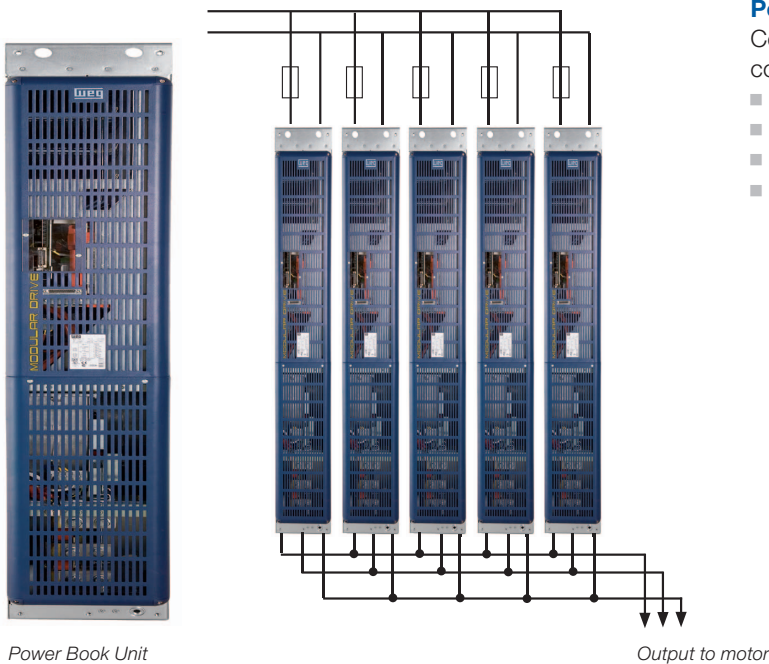

### Power Units

Compact modular VSD units that can be configured to the applicable motor power.

- Easy servicing.
- Configurable up to 5 power units.
- DC supplied by an input rectifier.
- Compact book format (width much smaller than the depth).

Configurable up to 5 power book units

## CFW11M - Drive Ratings

### Sizing the Drive

The correct way to select a VSD is matching its output current with the motor rated current. However, the tables below present the expected motor power for each VSD model.

Use the motor power ratings below only as a guidance. Motor rated currents may vary with speed and manufacturer. IEC motor powers are based on WEG 4-pole motors; NEMA motor powers are based on NEC table 430-150.

### Motor Voltages between 380-480V

Power Supply		Model	Normal Duty (ND)	IEC		NEMA	Heavy Duty (HD)	IEC		NEMA
				50 Hz 380 V 415 V	60 Hz 380 V 460 V	60 Hz 460 V		50 Hz 380 V 415 V	60 Hz 380 V 460 V	60 Hz 460 V
			A	kW	HP	HP	A	kW	HP	HP
380-480 V	3Ø	CFW11M 0600T4	600	315	450	500	515	280	350	450
		CFW11M 1140T4	1140	630	850	1000	979	500	700	800
		CFW11M 1710T4	1710	900	1250	1500	1468	800	1100	1250
		CFW11M 2280T4	2280	1250	1750	2000	1957	1120	1350	1750
		CFW11M 2850T4	2850	1600	2000	2500	2446	1250	1750	2000

### Motor Voltages between 500-600V

Power Supply		Model	Normal Duty (ND)	IEC		NEMA	Heavy Duty (HD)	IEC		NEMA
				50 Hz 525 V 575 V	60 Hz 575 V	60 Hz 575 V		50 Hz 525 V 575 V	60 Hz 575 V	60 Hz 575 V
			A	kW	HP	HP	A	kW	HP	HP
500-600 V	3Ø	CFW11M 0470T5	470	355	500	500	380	280	400	400
		CFW11M 0893T5	893	630	1000	1000	722	500	800	800
		CFW11M 1340T5	1340	1000	1350	1500	1083	800	1250	1100
		CFW11M 1786T5	1786	1250	1750	1750	1444	1120	1500	1350
		CFW11M 2232T5	2232	1600	2500	2500	1805	1400	2000	2000

### Motor Voltages between 660-690V

		Normal Duty (ND)	IEC		Heavy Duty (HD)	IEC		
			50 Hz 660 V 690 V	60 Hz 660 V		50 Hz 660 V 690 V	60 Hz 660 V	
Power Supply	Model	A	kW	HP	A	kW	HP	
660-690 V	3Ø	CFW11M 0427T6	427	400	550	340	315	400
		CFW11M 0811T6	811	710	1000	646	560	800
		CFW11M 1217T6	1217	1120	1500	969	900	1250
		CFW11M 1622T6	1622	1600	2000	1292	1250	1750
		CFW11M 2028T6	2028	2000	2500	1615	1400	2000

# WEG Worldwide Operations

## ARGENTINA

WEG EQUIPAMIENTOS  
ELECTRICOS S.A.  
(Headquarters San  
Francisco-Cordoba)  
Sgo. Pampiglione 4849  
Parque Industrial San Francisco  
2400 - San Francisco  
Phone(s): +54 (3564) 421484  
Fax: +54 (3564) 421459  
[info-ar@weg.net](mailto:info-ar@weg.net)  
[www.weg.net/ar](http://www.weg.net/ar)

## AUSTRALIA

WEG AUSTRALIA PTY. LTD.  
3 Dalmore Drive  
Carribean Park Industrial Estate  
Scoresby VIC 3179 - Melbourne  
Phone(s): 61 (3) 9765 4600  
Fax: 61 (3) 9753 2088  
[info-au@weg.net](mailto:info-au@weg.net)  
[www.weg.net/au](http://www.weg.net/au)

## BELGIUM

WEG BENELUX S.A.  
Rue de l'Industrie 30 D,  
1400 Nivelles  
Phone(s): + 32 (67) 88-8420  
Fax: + 32 (67) 84-1748  
[info-be@weg.net](mailto:info-be@weg.net)  
[www.weg.net/be](http://www.weg.net/be)

## CHILE

WEG CHILE S.A.  
Los Canteros 8600  
La Reina - Santiago  
Phone(s): (56-2) 784 8900  
Fax: (56-2) 784 8950  
[info-cl@weg.net](mailto:info-cl@weg.net)  
[www.weg.net/cl](http://www.weg.net/cl)

## CHINA

WEG (NANTONG) ELECTRIC  
MOTOR MANUFACTURING CO.,  
LTD.  
No. 128# - Xinkai South Road,  
Nantong Economic &  
Technical Development Zone,  
Nantong, Jiangsu Province.  
Phone(s): (86) 0513-85989333  
Fax: (86) 0513-85922161  
[info-cn@weg.net](mailto:info-cn@weg.net)  
[www.weg.net/cn](http://www.weg.net/cn)

## COLOMBIA

WEG COLOMBIA LTDA  
Calle 46A N82 - 54  
Porteria II - Bodega 7 - San  
Cayetano II - Bogotá  
Phone(s): (57 1) 416 0166  
Fax: (57 1) 416 2077  
[info-co@weg.net](mailto:info-co@weg.net)  
[www.weg.net/co](http://www.weg.net/co)

## FRANCE

WEG FRANCE SAS  
ZI de Chenes - Le Loup  
13 Rue du Morellon - BP 738  
38297 Saint Quentin Fallavier  
Phone(s): +33 (0) 4 74 99 11 35  
Fax: +33 (0) 4 74 99 11 44  
[info-fr@weg.net](mailto:info-fr@weg.net)  
[www.weg.net/fr](http://www.weg.net/fr)

## GERMANY

WEG GERMANY GmbH  
Industriegebiet Türrnich 3  
Geigerstraße 7  
50169 Kerpen-Türrnich  
Phone(s): +49 (0)2237/9291-0  
Fax: +49 (0)2237/9292-200  
[info-de@weg.net](mailto:info-de@weg.net)  
[www.weg.net/de](http://www.weg.net/de)

## INDIA

WEG Electric (India) Pvt. Ltd.  
#38, Ground Floor, 1st Main  
Road, Lower Palace Orchards,  
Bangalore - 560 003  
Phone(s): +91-80-4128 2007  
+91-80-4128 2006  
Fax: +91-80-2336 7624  
[info-in@weg.net](mailto:info-in@weg.net)  
[www.weg.net/in](http://www.weg.net/in)

## ITALY

WEG ITALIA S.R.L.  
V.le Brianza 20 - 20092 - Cinisello  
Balsamo - Milano  
Phone(s): (39) 02 6129-3535  
Fax: (39) 02 6601-3738  
[info-it@weg.net](mailto:info-it@weg.net)  
[www.weg.net/it](http://www.weg.net/it)

## JAPAN

WEG ELECTRIC MOTORS  
JAPAN CO., LTD.  
Yokohama Sky Building 20F,  
2-19-12 Takashima,  
Nishi-ku, Yokohama City,  
Kanagawa, Japan 220-001  
Phone: (81) 45 440 6063  
[info-jp@weg.net](mailto:info-jp@weg.net)  
[www.weg.net/jp](http://www.weg.net/jp)

## MEXICO

WEG MEXICO, S.A. DE C.V.  
Carretera Jorobas-Tula Km. 3.5,  
Manzana 5, Lote 1  
Fraccionamiento Parque  
Industrial - Huehuetoca,  
Estado de México - C.P. 54680  
Phone(s): + 52 (55) 5321 4275  
Fax: + 52 (55) 5321 4262  
[info-mx@weg.net](mailto:info-mx@weg.net)  
[www.weg.net/mx](http://www.weg.net/mx)

## NETHERLANDS

WEG NETHERLANDS  
Sales Office of  
WEG Benelux S.A.  
Hanzepoort 23C  
7575 DB Oldenzaal  
Phone(s): +31 (0) 541-571080  
Fax: +31 (0) 541-571090  
[info-nl@weg.net](mailto:info-nl@weg.net)  
[www.weg.net/nl](http://www.weg.net/nl)

## PORTUGAL

WEG EURO - INDÚSTRIA  
ELÉCTRICA, S.A.  
Rua Eng. Frederico Ulrich  
Apartado 6074  
4476-908 - Maia  
Phone(s): +351 229 477 705  
Fax: +351 229 477 792  
[info-pt@weg.net](mailto:info-pt@weg.net)  
[www.weg.net/pt](http://www.weg.net/pt)

## RUSSIA

WEG RUSSIA  
Pochainskaya Str. 17  
Nizhny Novgorod  
603001 - Russia  
Phone(s): +7-831-2780425  
Fax: +7-831-2780424  
[info-ru@weg.net](mailto:info-ru@weg.net)  
[www.weg.net/ru](http://www.weg.net/ru)

## SPAIN

WEG IBERIA S.L.  
Avenida de la Industria, 25  
28823 Coslada - Madrid  
Phone(s): (34) 916 553 008  
Fax: (34) 916 553 058  
[info-es@weg.net](mailto:info-es@weg.net)  
[www.weg.net/es](http://www.weg.net/es)

## SINGAPORE

WEG SINGAPORE PTE LTD  
159, Kampong Ampat,  
#06-02A KA PLACE.  
Singapore 368328.  
Phone(s): +65 6858 9081  
Fax: +65 6858 1081  
[info-sg@weg.net](mailto:info-sg@weg.net)  
[www.weg.net/sg](http://www.weg.net/sg)

## SWEDEN

WEG SCANDINAVIA AB  
Box 10196  
Verkstadgatan 9  
434 22 Kungsbacka  
Phone(s): (46) 300 73400  
Fax: (46) 300 70264  
[info-se@weg.net](mailto:info-se@weg.net)  
[www.weg.net/se](http://www.weg.net/se)

## UK

WEG ELECTRIC  
MOTORS (U.K.) LTD.  
28/29 Walkers Road  
Manorside Industrial Estate  
North Moons Moat - Redditch  
Worcestershire B98 9HE  
Phone(s): 44 (0)1527 596-748  
Fax: 44 (0)1527 591-133  
[info-uk@weg.net](mailto:info-uk@weg.net)  
[www.weg.net/uk](http://www.weg.net/uk)

## UNITED ARAB EMIRATES

WEG MIDDLE EAST FZE  
JAFZA - JEBEL ALI FREE ZONE  
Tower 18, 19th Floor,  
Office LB 18 1905  
P.O. Box 262508 - Dubai  
Phone: +971 (4) 8130800  
Fax: +971 (4) 8130811  
[info-ae@weg.net](mailto:info-ae@weg.net)  
[www.weg.net/ae](http://www.weg.net/ae)

## USA

WEG ELECTRIC CORP.  
6655 Sugarloaf Parkway,  
Duluth, GA 30097  
Phone(s): 1-678-249-2000  
Fax: 1-770-338-1632  
[info-us@weg.net](mailto:info-us@weg.net)  
[www.weg.net/us](http://www.weg.net/us)

## VENEZUELA

WEG INDUSTRIAS VENEZUELA C.A.  
Avenida 138-A  
Edificio Torre Banco Occidental de  
Descuento, Piso 6 Oficina 6-12  
Urbanización San Jose de Tarbes  
Zona Postal 2001  
Valencia, Edo. Carabobo  
Phone(s): (58) 241 8210582  
(58) 241 8210799  
(58) 241 8211457  
Fax: (58) 241 8210966  
[info-ve@weg.net](mailto:info-ve@weg.net)  
[www.weg.net/ve](http://www.weg.net/ve)



WEG Equipamentos Elétricos S.A.  
International Division  
Av. Prefeito Waldemar Grubba, 3000  
89256-900 - Jaraguá do Sul - SC - Brazil  
Phone: 55 (47) 3276-4002  
Fax: 55 (47) 3276-4060  
[www.weg.net](http://www.weg.net)